


# Symmetry Residential Elevator

# Hydraulic Drive





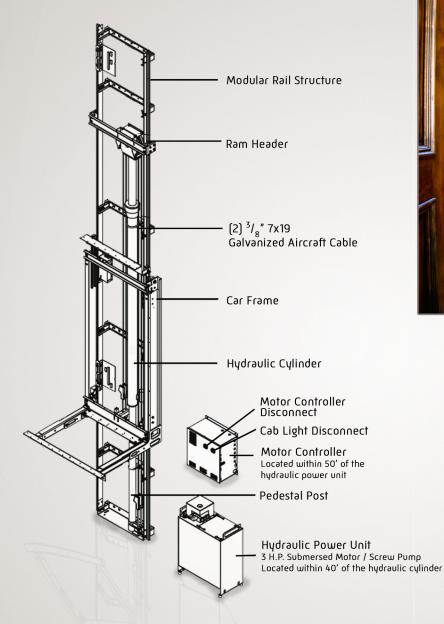

Your local provider:



(855) DME-LIFT (855-363-5438) info@dmelift.com www.dmelift.com Serving Illinois - Wisconsin - Indiana

















# Smoothest, quietest hydraulic drive on the market

With more standard features than any other elevator available, the Symmetry Hydraulic drive is the industry leader. We offer as standard: battery lowering, digital position indicators on the COP and hall stations, custom wood sill, and LED lighting. Our custom options also lead the industry.

#### Standard Features:

- Travel: Maximum of 50' (minimum 12" between stops)
- Speed: 40 FPM
- Load Capacity: 950#
- \* Overhead: Minimum of 8' (96")
- Pit depth: 6" minimum (8" preferred)
- Two stops
- Single opening
- · Three year limited parts warranty

## Mechanical Equipment:

- Modular 6 <sup>1</sup>/<sub>n</sub># T-rail structure
- Car frame assembly
- 208/230 VAC, 60Hz, 30 amp single phase power supply for motor controller
- 120 VAC, 60 Hz, 15 amp single phase power supply for lighting
- (2) <sup>3</sup>/<sub>8</sub> 7x19 galvanized aircraft cable (14400# breaking strength) with wedge rope shackles
- 80mm diameter piston/102mm diameter cylinder incl. 1"  $^3/_{\mu}$ " reducer bushing
- 208/230, 3HP submersed motor with 2-speed valve assembly (1750RPM, 17 FL Amps) - Manual down valve for emergency lowering
- Screw pump (300 micron screen)
- Positive pressure switch
- Code compliant electrical disconnects included

#### Safety Features:

- Slack rope safety device
- Motor controller supply (located in controller)
- Car light supply (located in controller)
- Rupture valve (Type "C" Safety)
- Pit stop switch
- Car top stop switch
- In-car emergency stop switch and alarm
- Safety switch for car gate(s)
- Battery back up emergency car lights and alarm
- Electromechanical hoistway door interlocks (doors by others)
- \* Non proprietary controller designed for long term serviceability

#### Controls:

- Programmable Logic Controller (PLC)
- Non-selective collective automatic operation
- \* S.M.A.R.T. system (Self-Monitoring Alert Response Technology)
- Car Operating Panel (COP) available in multiple finishes with LED floor position indicator
- Hall Stations available in multiple finishes with call button and car arrival indicator
- Recessed phone box available in multiple finishes (phone jack included)
- Automatic car lighting
- Single floor designated car homing
- \* Uninterruptible Power Supply (UPS) for car lowering and automatic gate operation (if provided) in the event of power failure

#### Car Features:

- Cab size up to 15 square feet
- 7'0" interior car height
- \* Birch, Oak, or Maple flat veneer interior walls with matching ceiling
- Matching wood handrail
- \* Matching wood car sill
- Unfinished plywood floor with sill set for .75" (flooring by others)
- \* 2 energy saving recessed LED Lights with trim rings
- 7'0" vinyl laminate accordion gate (light oak, dark oak, white or antique white)

**Division 14 Specs**: <u>www.div14specs.com</u> - One stop website to view brochures, download specifications, CAD, PDF, and Revit files.


**SpeCreator:** <u>www.specreator.us</u> - Custom designed software and specification generator created to easily build division 14 product specifications. The SpeCreator will create your project specific set of CSI 3-part specifications.

### Optional Features:

- Up to six stops
- Single automatic push button operation
- Custom car size up to 18 square feet
- Custom car heights
- Recessed panel car with flush ceiling
- Recessed panel car with matching ceiling
- Raised panel car with matching ceiling
- \* 4 recessed LED lights with fixture matching trim rings
- Factory finished car
- Polished stainless steel, polished brass, brushed nickel, vintage bronze and oil rubbed brass fixtures (including COP, phone box, hall calls, and handrail)
- \* COP with integrated phone box
- Custom wood interiors
- \* Custom factory finishes (antiqued, distressed, & crackle)
- \* Green material alternatives and finishes for car interiors
- Scissor gate
- Hardwood veneer accordion gate
- Clear panel accordion gate
- Autogate operator (available for use with accordion gate only)
- .75" finished or unfinished factory installed hardwood car flooring
- Factory flooring insert for <sup>1</sup>/<sub>u</sub>" (flooring by others)
- Buffer springs (requires minimum of 10" pit depth)
- Key switch for COP and hall stations
- 750# car capacity

## \* This symbol denotes exclusive features

\*\*May require local code authority approval



\*This brochure is intended for informational purposes only

Car Size	Width	Depth	Rail C/L	Door C/L	Clear Opening
36 x 48	50½"	54½"	271⁄4″	28¾"	32¼"
36 x 60	50½"	66½"	33¼″	28¾"	32¼"
40 x 54	54½"	60½"	30¼"	32¾"	33½"



National Reach. Local Service.