


Symmetry Elevating Solutions Symmetry Safety Door 3 Panel Car Door










Automatic gate operator
 Available with solid panel
 Six (6) finish options

NAHB






ØATA

Safest Elevator Car Door on the Market

The Symmetry Safety Door is the safest elevator car door on the residential elevator market. When coupled with the Flush Mount Door Package, our 3 panel safety door creates a minimal amount of space between the elevator car door and landing door. The design makes the entrance as safe as possible.

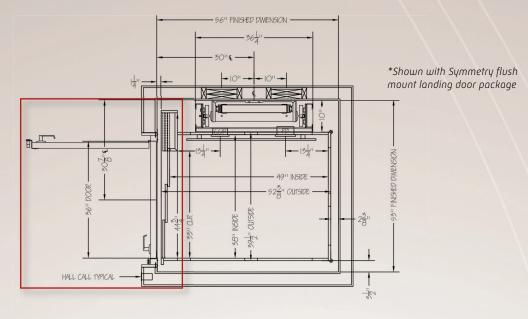

Specifications

- Symmetry Safety 3 Panel Car Door Operation
 - Manual (Standard)
 - Power Operated (Optional 4 second opening time typical)
- Opening Sizes
 - 33" Clear Opening (Standard)
 - Fits in a typical hoistway with a 36" wide car.
 - 36" Clear Opening (Optional)
 - Fits in a typical hoistway with a 40" wide car.
- Opening Height
 - 7'-0" (Standard)
 - 7'-11" (Optional)
 - Custom heights available on request.
- Safety Features
 - When combined with the flush mount door frame, and the maximum 1^{1/4}" running clearance, the distance from the car door to the hoistway door is reduced to 3^{1/2}" on the manually operated version and 2" on the power operated version.
 - Light curtain on car entrance.

Finish Options



SYMMETRY
 elevating solutions
 National Reach. Local Service.*

877.375.1428 | SymmetryElevator.com 907.05/15