



National Reach. Local Service.®

# Symmetry Vertical Platform Lift

## VPL-UL

Unenclosed Commercial Application



- Available with Accelerated Acme Screw Drive at 20 fpm
- Optional full-speed battery backup

Your local provider:



(855) DME-LIFT (855-363-5438)

info@dmelift.com

www.dmelift.com

Serving Illinois - Wisconsin - Indiana

[symmetryelevator.com](http://symmetryelevator.com)  
**877.375.1428**



# Convenient access to all levels

Whether for commercial or residential, outdoor or indoor use, Symmetry Vertical Platform Lifts help eliminate the barrier that stairs may present for people with limited mobility.

## Standard Features

- 750-lb. capacity
- Speed: 10 fpm
- Motor: 1.5 hp, 115V [Acme Screw Drive]
- Lifting height: up to 60"
- Steel construction with powder-coated finish
- **A.W.A.R.E. system [Active Wiring, Accessories, Relay, and Electronics Diagnosis]\***
- Constant-pressure up/down control switch installed on the platform
- Constant-pressure elevator-style hall call control station provided at each landing

## Drive Options

- Acme Screw Drive: 10 fpm, 1.5 hp, 115V
- Accelerated Acme Screw Drive: 20 fpm, 1.5 hp, 115V
- Chain Hydraulic Drive: 17–20 fpm, 3 hp, 115V

## Optional Features

- **Remote mounted controller\***
- 230V motor
- ADA phone for both indoor and outdoor models
- Emergency lights
- Key switch to lock platform and landing controls
- Flip-up ramp
- Full-speed battery backup
- **Power gate operators\***

## Safety Features

- Non-skid platform surface (black)
- Obstruction safety panel under platform
- Alarm and illuminated emergency stop switch
- Grab rail
- Landing interlocks keep doors closed/locked when the platform is at another landing
- Upper final limit switch

## Clear Platform Sizes

- 36"W x 48"D
- 36"W x 54"D
- 36"W x 60"D
- 42"W x 60"D
- Custom sizes available

## Enter/Exit Configurations

- Straight-through
- 90° adjacent

## Platform Lift Gate/Door Options

- 42" platform gate\*\*
- 42" landing gate\*\*
- 80" landing gate\*\*
- Non-fire-rated red oak door†
- Fire-rated steel door

## Warranty

Symmetry Vertical Platform Lifts offer an industry-leading four-year (4) warranty on parts, including all electrical and drive components.

\*Symmetry Elevating Solutions exclusive; \*\*Available with optional acrylic insert; †Also available in other wood choices, by request.

The Symmetry VPL-UL Model is designed in compliance with ICC/ANSI A117.1, NEC, and ASME A18.1. The entire Symmetry VPL product line is designed around ADA 4.11 compliance and public and private accessibility.

Division 14 Specs: [www.div14specs.com](http://www.div14specs.com) — View brochures and download specifications: CAD, PDF, and Revit files.

SpecCreator: [www.speccreator.us](http://www.speccreator.us) — Specification generator created to easily build Division 14 product specifications.

*This brochure is intended for INFORMATIONAL PURPOSES ONLY and SHOULD NOT be used for construction.*



Straight-Through Configuration				
Clear Platform Size	Equipment Width [1]	Equipment Length [2]	Pit Width [1]	Pit Length
36" x 48"	50½"	49¾"	53½"	51¼"
36" x 54"	50½"	55¾"	53½"	51¼"
36" x 60"	50½"	61¾"	53½"	63¾"
42" x 60"	56½"	61¾"	59½"	63¾"
90° Configuration				
36" x 60" [3]	49½"	63"	50¼"	66¼"
42" x 60"	55½"	63"	56¼"	66¼"

[1] Additional 1" equipment width required when supplied with a platform gate that is hinged on the same side as the main tower.

[2] Equipment length increases when supplied with a ramp.


[3] In the 90° configuration, 36" x 60" is only available for existing construction.

## Footprint Layout

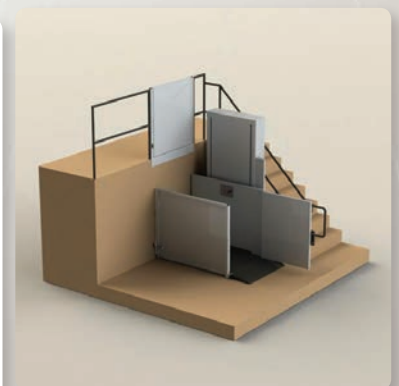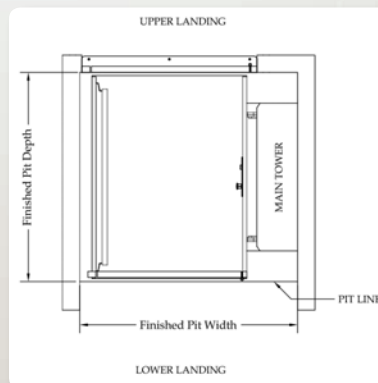


Straight-Through Unenclosed Configuration Shown

## Color Options



Ivory  
standard



White  
optional



Black  
optional



Gray  
optional