



# Symmetry Vertical Platform Lift

# Model VPC-SL

Vertical Platform Conveyance-Shaftway Lift Residential and Commercial Application



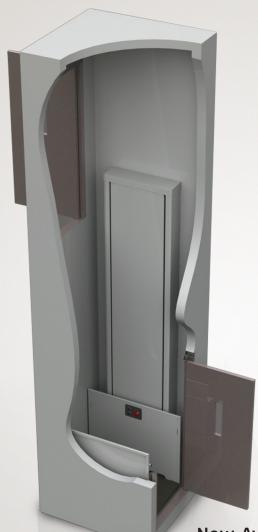



- Low Profile Carriage
- High Speed Screw Drive at 20 fpm
- Full Speed Battery Back-up
- Reduced Pit Application

Your local provider:



















(855) DME-LIFT (855-363-5438) info@dmelift.com www.dmelift.com Serving Illinois - Wisconsin - Indiana

### Convenient access to all levels

Whether it's commercial or residential use, outdoors or indoors, Symmetry vertical platform lifts eliminate the barrier that stairs can cause for people with limited mobility. A cost-effective solution, platform lifts create convenient access without compromising architectural character.

A18.1 code-compliant and designed for ease of installation.

#### Standard Features

- 750# capacity
- Speed: 10 FPM with a 1HP, 115V motor
- Lifting height: up to 168"
- Steel constructed with electrostatic, powder-coated finish
- \* A.W.A.R.E. system
- Constant pressure up/down control switch installed on the platform
- Constant pressure, elevator-style, hall call control stations provided at each landing

#### **Optional Features**

- Low profile Carriage: 1 1/2" pit depth
- 230V motor
- Remote mounted controller
- ADA phone for both indoor and outdoor models
- Emergency lights
- Key switch to lock platform and landing controls
- Stationary Ramp
- Battery Back-up at Full Speed

#### Safety Features

- Nonskid platform surface (black)
- Obstruction safety panel under platform (when not installed within a runway enclosure)
- Alarm and emergency stop switch
- Grab rail
- Landing interlocks keep door locked when the lift is on another floor
- Upper final limit

#### Platform Sizes

- 36" W x 48" D
- 36" W x 54" D
- 36" W x 60" D
- 42" W x 60" D

#### Enter/Exit Configurations

- Straight through
- 90°
- Enter/Exit same side

#### Vertical Platform Lift Gate/Door Options

- 42" lower platform gate\*
- 42" upper landing gate\*
- 80" landing gate\*
- Non-fire-rated red oak door\*\*
- Fire-rated steel door
- \*Available with optional acrylic insert
- \*Indicates exclusive to Symmetry Elevating Solutions
- \*\*Also available in other wood choices, by request

Symmetry platform lifts come with an industry leading four (4) year warranty on parts & basic unit, including all electrical and drive components.

\* A.W.A.R.E. system (Active Wiring, Accessories, Relay & Electronics Diagnosis). Available only through Symmetry Elevating Solutions

**Division 14 Specs**: <u>www.div14specs.com</u> - One stop website to view brochures, download specifications, CAD, PDF, and Revit files.

**SpeCreator:** <u>www.specreator.us</u> - Custom designed software and specification generator created to easily build division 14 product specifications. The SpeCreator will create your project specific set of CSI 3-part specifications.


#### **VPC Drive Options**

- Screw Drive: 9 fpm
- High Speed Screw Drive: 20 fpm
- Screw Drive with Full Speed Battery Back-up ( 9 fpm or 20 fpm )
- Chain Hydraulic Drive 2HP / 24VDC: 20 fpm

Straight through configuration			
Platform Width	Platform Length	Finished Hoistway/Pit Width	Finished Hoistway/Pit Length
36"	48"	511/2"	491/2"
36"	54"	511/2"	551/2"
36"	60"	511/2"	611/2"
42"	60"	571/2"	611/2"
90° Exit configuration			
42"	60"	551/4"	631/2"
Enter/Exit same side configuration			
36"	54"	511/2"	<b>57</b> 1/2"
36"	60"	511/2"	631/2"
42"	60"	571/2"	631/2"

\*This brochure is intended for informational purposes only

### Footprint Layout





Straight Through Shaftway Application Shown

#### **Enclosure Color Options**





White optional Grey optional

Full selection of RAL colors available

